UX-IPR8540DQAE-PZ

4MP Nighthawk Full color Active Deterrence Varifocal Bullet Network Camera



AI | 4MP | WDR | H.265 | VF Lens | MicroSD | IP67

Key Features


- 1/1.8” STARVIS™ CMOS
- Max. 4MP (2688×1520) @25/30fps resolution
- H.265, H.265+, H.264, H.264+ Encoding
- Support face, human, vehicle detection and capture
- Intelligent UXmind analysis: intrusion, single / double line crossing, loitering, wrong-way detection, smart motion detection, and people counting
- True WDR, 3D DNR, ROI, HLC, BLC, Defog
- Built-in warm lights, illumination distance up to 40m or 60m
- Built-in red and blue warning light, support sound-light warning
- 1/1 alarm in/out, 1/1 audio in/out, built-in mic and speaker
- Built-in microSD card slot (up to 1 TB)
- Support 12VDC/0.25A power output
- IP66 protection

Specification

Camera	
Image Sensor	1/1.8” Progressive Scan CMOS
Max. Resolution	4MP (2688×1520)
Electronic Shutter	Auto/Manual, 1/5 to 1/50,000s
Min. illumination	Color: 0.0001 Lux @ (F1.0, AGC ON), 0 Lux with warm-light ON
Day & Night	Fixed filter
Wide Dynamic Range	True WDR
Angle Adjustment	Pan: 0˚ to 360˚, Tilt: 0˚ to 90˚, Rotation: 0˚ to 360˚
Lens	
Lens Type	Varifocal lens, Motorized focal
Iris	Auto Iris
Focal Length	4.5 to 8 mm and 8 to 32 mm optional
Max. Aperture	F1.0
Field of View (FOV)	4.5 to 8 mm, H: 101° to 57.5°, V: 52.7° to 32° 8 to 32 mm, H: 39.7° to 16°, V: 22.6° to 9.2°
DORI	
DORI Distance	4.5 to 8 mm: Wide: D: 69 m (226.4 ft), O: 27.6 m (90.6 ft), R: 13.8 m (45.3 ft), I: 6.9 m (22.6 ft) Tele: D: 113 m (370.7 ft), O: 45.2 m (148.3 ft), R: 22.6 m (74.1 ft), I: 11.3 m (37.1 ft) 8 to 32 mm: Wide: D: 159 m (521.7 ft), O: 63.6 m (208.7 ft), R: 31.8 m (104.3 ft), I: 15.9 m (52.2 ft) Tele: D: 370 m (1,213.9 ft), O: 148 m (485.6 ft), R: 74 m (242.8 ft), I: 37 m (121.4 ft)
DORI (Detect, Observe, Recognize, and Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances.	
Illuminator	
Illuminator Type	Warm light
Illumination Range	4.5 to 8 mm: up to 40 m (131.2 ft) 8 to 32 mm: up to 60 m (196.9 ft)
Illumination On/Off Control	Auto/Manual
Intelligent Analytics	
Multi-Object Detection	Supports face, human, vehicle detection and capture
Intelligent Analysis	Intrusion, Single line crossing, Double line crossing, Loitering, Wrong-way, and Smart motion detection Support alarm triggering by specified target types (human and vehicle)
People Counting	Support
Video and Audio	
Streaming Capability	3 Streams
Stream/Frame Rate	Stream1: 2688×1520, 2560×1440, 2304×1296, 1920×1080, 1280×720 @25/30fps Stream2: D1, VGA, CIF @25/30fps Stream3: VGA, CIF, QVGA @25/30fps
Bit Rate Control	CBR/VBR
Bit Rate	Stream1: 200 Kbps to 12 Mbps Stream2: 100 Kbps to 6 Mbps Stream3: 100 kbps to 3 Mbps
Region of Interest	Off/On (8 areas, Rectangle)
Smart Encode	Support
Audio Compression	G.711 A-law, G.711 μ-law, RAM PCM

Audio Bit Rate	64 Kbps (G.711), 128 Kbps (RAW_PCM)
Image	
Image Adjustment	Brightness, Sharpness, Contrast, Saturation adjustable
Scene Setting	Indoor, Outdoor, Mirror, Corridor Mode
Exposure Mode	Auto, Manual, Shutter priority
White Balance	Auto, Tungsten, Fluorescent, Daylight, Shadow, Manual
Day/Night Setting	Auto, Day, Night, Timer
Noise Reduction	2D/3D DNR
Image Enhancement	WDR, HLC, BLC, Defog
Privacy Masking / ROI	4 areas / 4 areas
Event	
Alarm Triggers	IVS, Motion detection, Alarm input, Network alarm, Disk alarm, Day/Night switch alarm, Abnormal sound detection
Event Action	Alarm record, Alarm output, FTP upload, SMTP upload, Audible alarm output, Red and blue light alarm
Network	
Protocols	IPv4/IPv6, HTTP/HTTPS, DNS, DDNS, DHCP, PPPoE, RTSP/ RTCP/RTP, TCP/UDP, NTP, ARP, UPnP, FTP, SMTP, QoS, ICMP, IGMP, SMTP, 802.1x, SNMP, Multicast
Interoperability	ONVIF (Profile S/T/G/M), SDK, CGI
User/Host Level	Up to 10 users, 3 levels: Administrator, Operator, Media user
Security	IP address filter, encrypted HTTPS, Illegal login lock, IEEE 802.1x
Web Viewer	<IE11, Chrome, Firefox, Microsoft Edge
Interface	
Network Interface	1 Ethernet (10/100 Base-T) RJ-45 Connector
Built-in Microphone	Support
Built-in Speaker	Support
Audio Interface	1ch Input, 1ch Output
Alarm Interface	1ch Input, 1ch Output
SD Card Slot	Built-in, up to 1 TB
Reset Button	Support
Power Output	12VDC/0.25A output
General	
Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian. Default: English
Power Supply	12 VDC (-15% to +25%)/PoE (802.3af)
Power Consumption	Max. 11W
Operating Temperature	-40°C to 60°C (-40°F to 140°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP66
Certifications	CE-EMC (EN 55032:2015+A1:2020, EN IEC 61000-6-3:2021, EN IEC 61000-3-2:2019+A12021, EN 61000-3-3:2013+A2:2021, EN 55035:2017+A11:2020, EN 50130-4:2011+A1:2014) FCC (FCC 47 CFR 15, Subpart B, ANSI C63.4-2014)
Material	Aluminum alloy + plastic
Dimensions	303 × 100 × 107 mm (11.9 × 3.94 × 4.21 inch)
Net Weight	1.25 kg (2.76 lb)

Dimensions (mm)

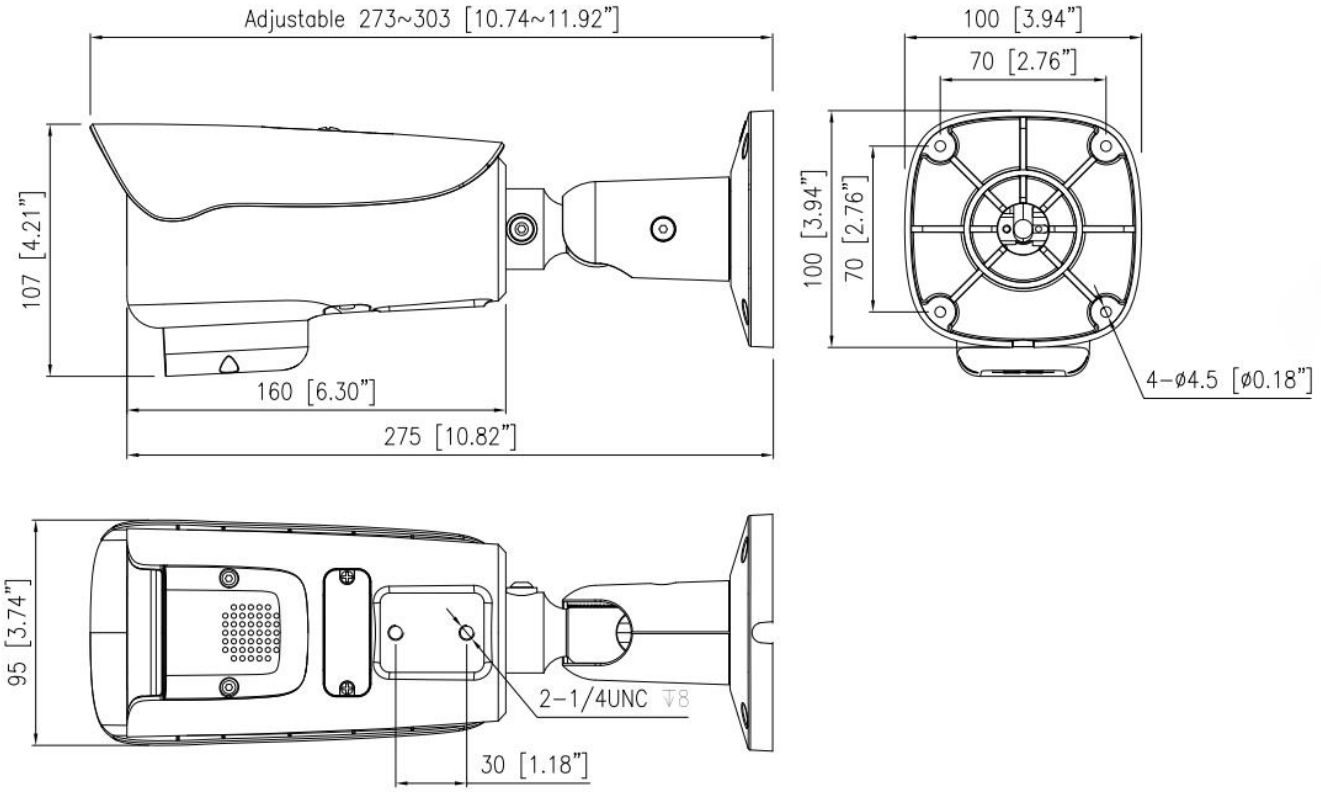

Accessories

Optional:



UX-CBK645G
Junction Box



UX-CBK627D
Pole Mount



UX-CBK101
Pole Mount



UX-CBK102
Corner Mount

NDAA Compliant Product

The John S. McCain National Defense Authorization Act (NDAA) for Fiscal Year 2019 was signed into law on August 13, 2018. The law, specifically Section 889, amongst other things prohibits federal agencies, their contractors. and grant or loan recipients from procuring or using "telecommunications and video surveillance equipment or services" from specific Chinese companies as a "substantial or essential component of any system, or as critical technology as part of any system." The NDAA ban also extends to other manufacturers in cases in which the video surveillance cameras or systems from the specified vendors are offered under another manufacturer. Some Chinese banned manufactures are: ZTE Corporation, Dahua Technology Company, Huawei Technologies Company, Hytera Communications Corporation, Hangzhou Hikvision Digital Technology Company.
For more information visit:
https://www.federalregister.gov/documents/2020/07/14/2020-15293/federal-acquisition-regulation-prohibition-on-contracting-with-entities-using-certain

©2024 UXtech all rights reserved. Design and specifications are subject to change without notice.